

Approximate Smoker Capacities

(Capacities will vary based on physical shape, weight, and method of loading for each product specified.)

	<u>Standard</u>	<u>Max.</u>
Pork Butts (8-10 lbs)(4-5 kg) each.....	72 pieces	72 (4 racks)
Baby Back Ribs (3 lbs)(1 kg) each.....	60 pieces	135 (9 racks)
Whole Chickens (3-4 lbs)(1-2 kg) each.....	96 pieces	144 (6 racks)
Beef Briskets (12-15 lbs)(5-7 kg) each.....	24 pieces	36 (6 racks)




(18) rack slides, 1-1/2" (38mm) spacing
50.6 ft² (4.7 m²) standard cooking surface

Standard Features:


- 304 series stainless steel construction; interior and exterior.
- High temperature blanket insulated cabinet.
- 6" (152mm) locking casters.
- Convection fan with 10" (254mm) blower wheel.
- Control with a digital cook and hold thermostat (140° to 325°F)(60° to 163°C), allows for selection of cook temperature, cook time, hold temperature, and programming of 30 preset menus.
- Firebox for 1-3 logs (1.5 ft³).
- 2" (51mm) grease drain with ball valve.
- (5) 26" x 56" (660 x 1422mm) nickel chrome plated product racks.

Model: SRG-800 (120v model)


Gas-Fired Wood-Burning Stationary Rack Smoker

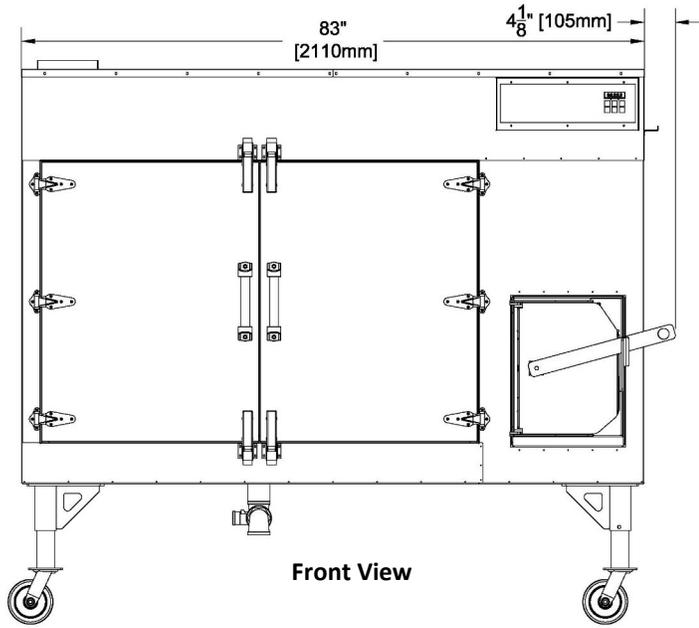

Front View

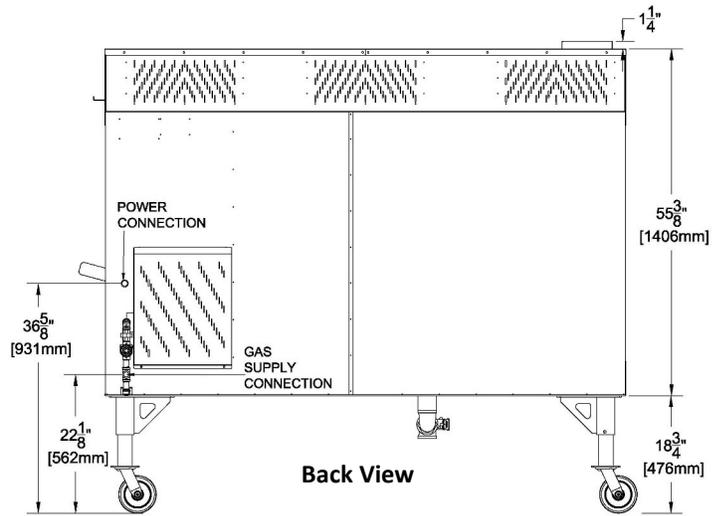

Back View

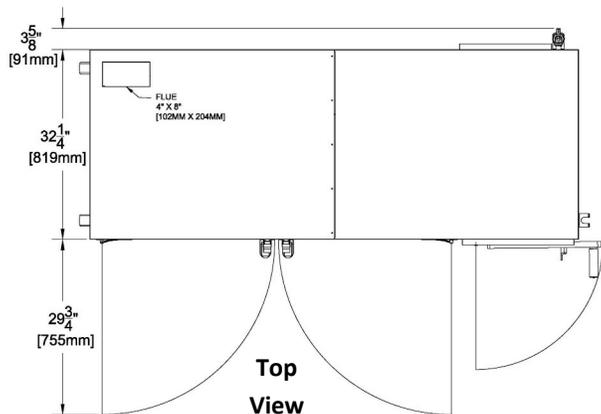

Top View

REQUIREMENTS

GAS

1/2 inch gas inlet (NPT)

100,000 BTU (29 KW) - Natural (NG)

Supply line pressure - 4.5" W.C. min - 10.0" W.C. max (11.2 - 24.9 mbar)

OR

100,000 BTU (29 KW) - Propane (LP)

Supply line pressure - 11.0" W.C. min - 13.0" W.C. max (27.4 - 32.4 mbar)

ELECTRICAL

120 volt AC, 60 hertz, 1-phase, 15 amp wiring required, NEMA 5-15P plug

VENTILATION

The smoker must be vented in accordance with the Owner's Manual and the installation must comply with NFPA® 96 and all relevant local and national codes and in a manner acceptable to the authority having jurisdiction.

SMOKER WEIGHT - 1,100 lbs. (499kg)

SHIPPING (crated) - 1,335 lbs. (606 kg)

48"L x 90"W x 83"H (1219 x 2286 x 2108mm)

Minimum Clearance Requirements from Combustible Material

Back.....18" (457mm) Right & Left Side.....2" (51mm)

Front.....48" (1219mm) Top.....18" (457mm)

NOTE: If provision is made for service access, back clearance can be reduced to 2" (51mm).